



## Install the tutorial of (Full coverage water block for ASUS STRIX 5700XT)

### INSTALL TUTORIAL (DEMONSTRATION)

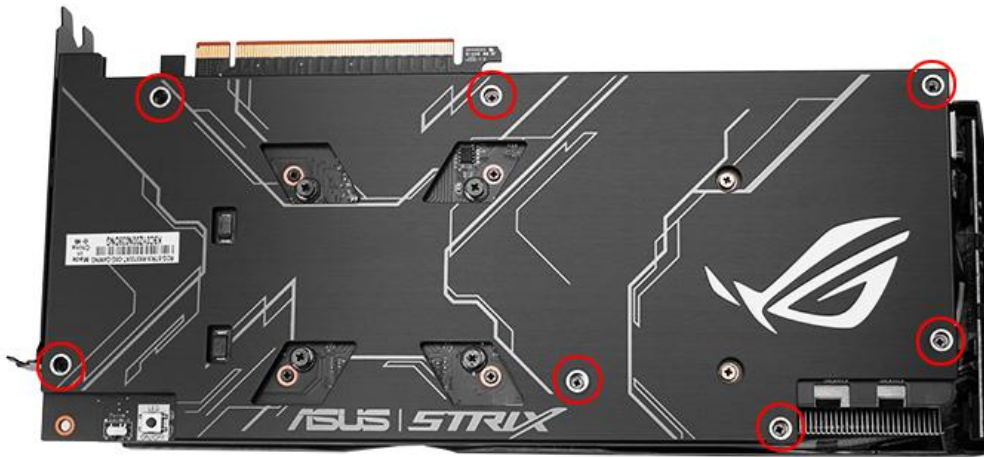


1.Remove the red position screws in the picture

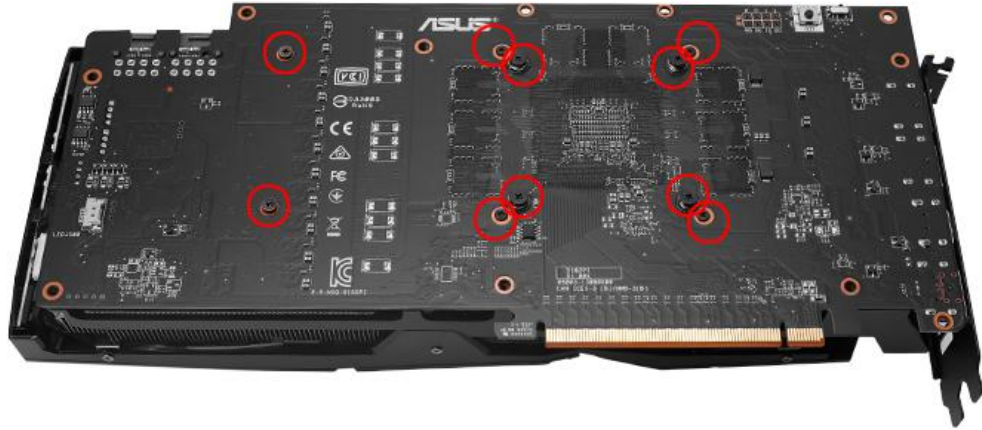

2.Remove the red position screws in the picture




3.Remove the red position screws in the picture

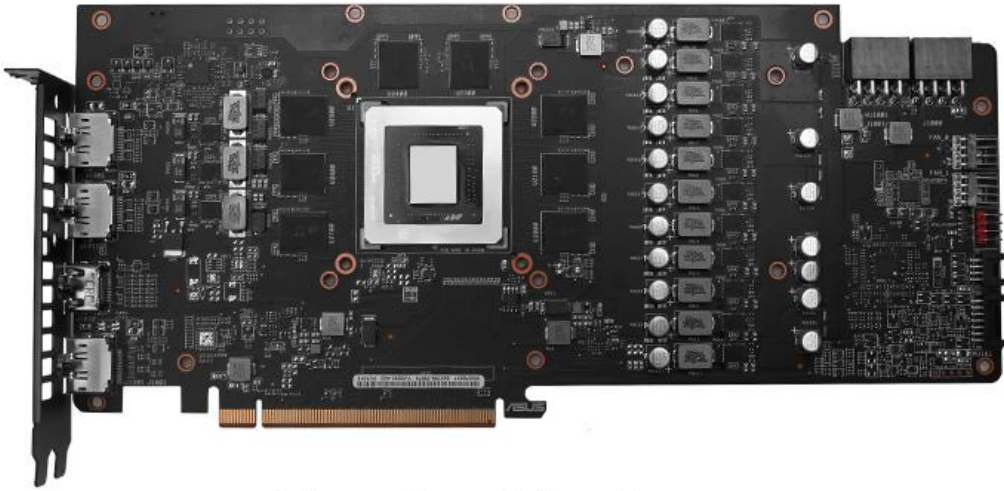


4.Clean and re-apply thermal grease




5.Stick the corresponding specifications of thermal grease in the corresponding position, paying attention to the cutting size

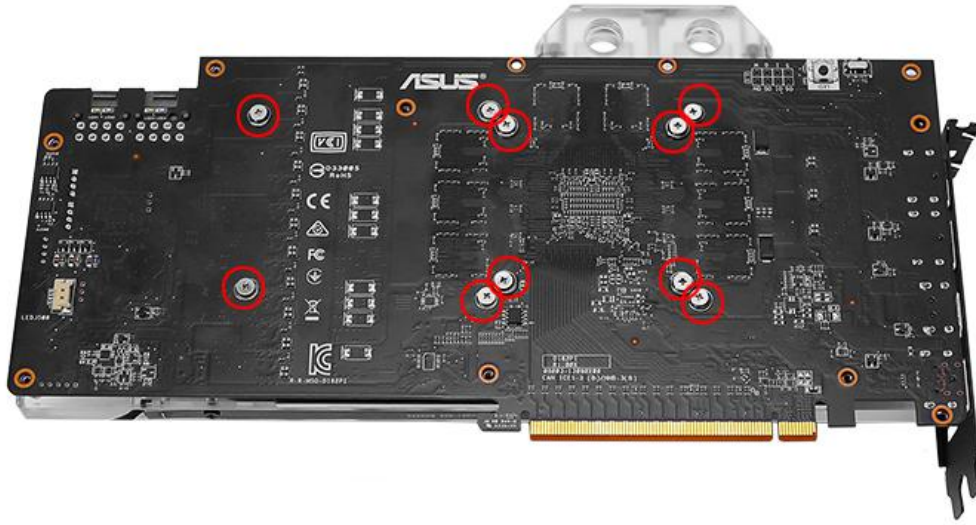

6. Mount the red position screws in the picture

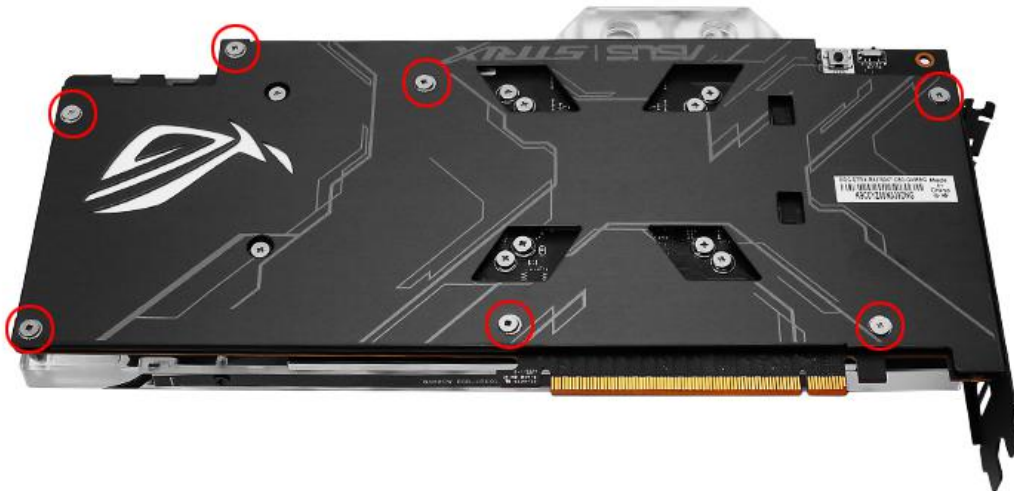

7. Mount the red position screws in the picture

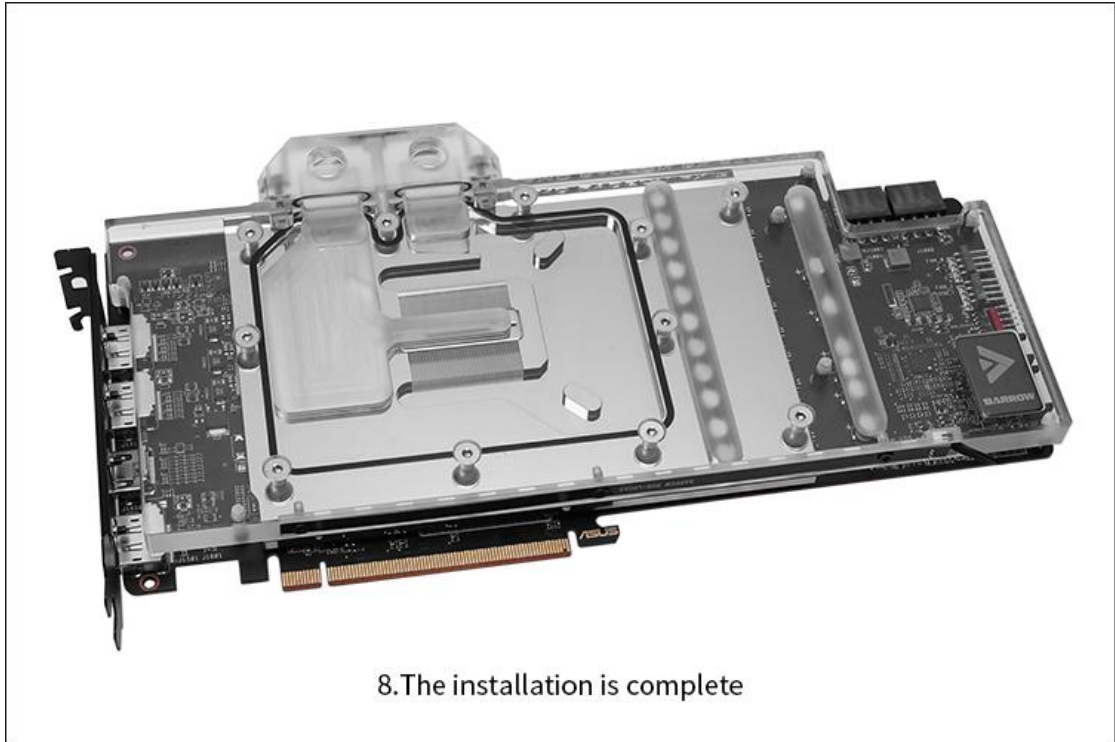


8.The installation is complete

# 安装教程(图纸示范)


DEMONSTRATION INSTALLATION TUTORIAL (DRAWING)

## 第一步：原装散热器拆除


THE FIRST STEP: ORIGINAL RADIATOR REMOVED THE FIRST STEP: ORIGINAL RADIATOR REMO



原装显卡




拆除原装显卡背板螺丝




拆除风扇的电源线并分离原装散热器

## 第二步：涂抹硅脂/黏贴硅胶垫


THE FIRST STEP: ORIGINAL RADIATOR REMOVED THE FIRST STEP: ORIGINAL RADIATOR REMOVEDAL RADIAT



清理原电路板及芯片的残留硅脂并重新涂抹一层薄薄的硅脂




将导热胶垫切为合适的尺寸




贴在显卡的发热芯片上

## 第三步：安装冷头


THE FIRST STEP: ORIGINAL RADIATOR REMOVED THE FIRST STEP:



将显卡冷头底板螺丝对准显卡螺丝孔位使两者贴合



显卡原装背板孔位对准贴合用弹簧螺丝锁紧



安装完成

\* 注意：如不安装显卡背板，需在安装孔位放置绝缘垫片再用弹簧螺丝锁紧。  
通用版本图纸安装示范教程，具体安装细节有可能根据不同显卡略有不同，以实物为准。