

BARROW



First remove the road marked four spring screws, put aside ①

BARROW




Remove spare ②

BARROW



Remove two spring screws

③

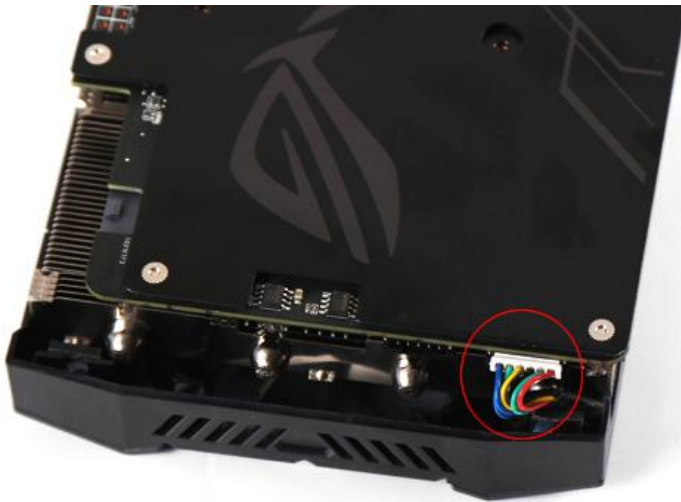


Remove fan connector

BARROW

④

BARROW

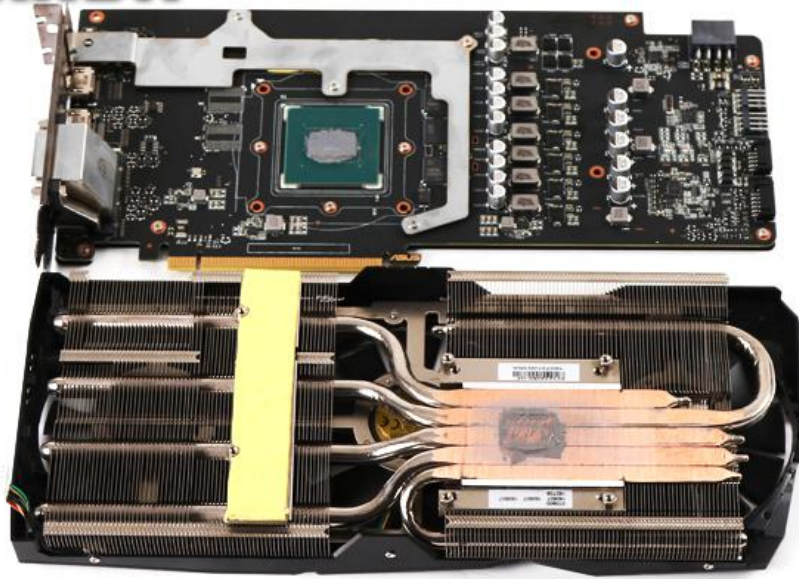

Graphics card original radiator removed

⑤


BARROW

Remove the original radiator bracket and screw up



⑥

Remove and clean the radiator bracket with the original grease

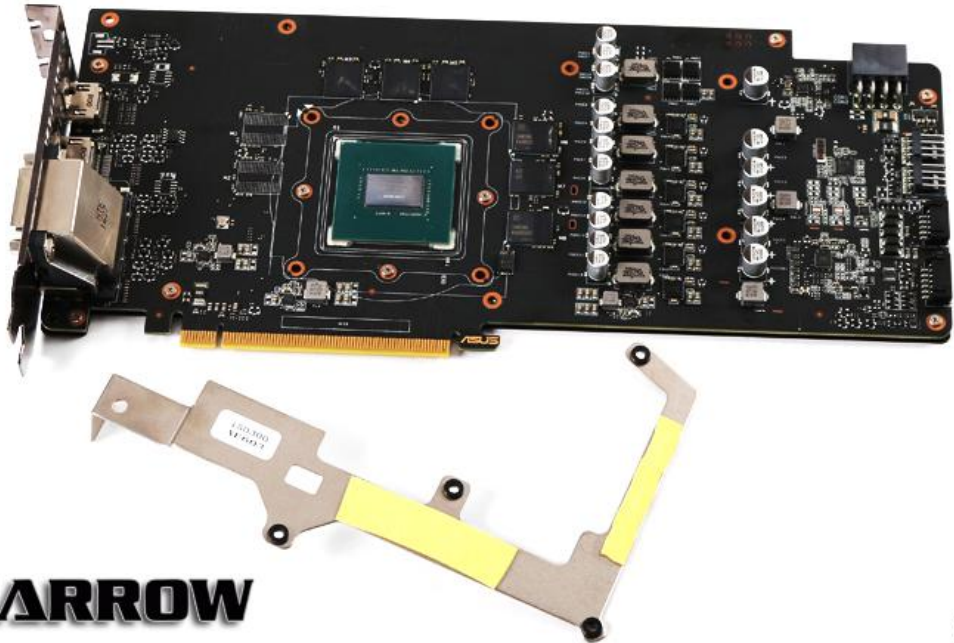

BARROW


⑦



If customers good thermal grease, note the shear size

BARROW

⑧

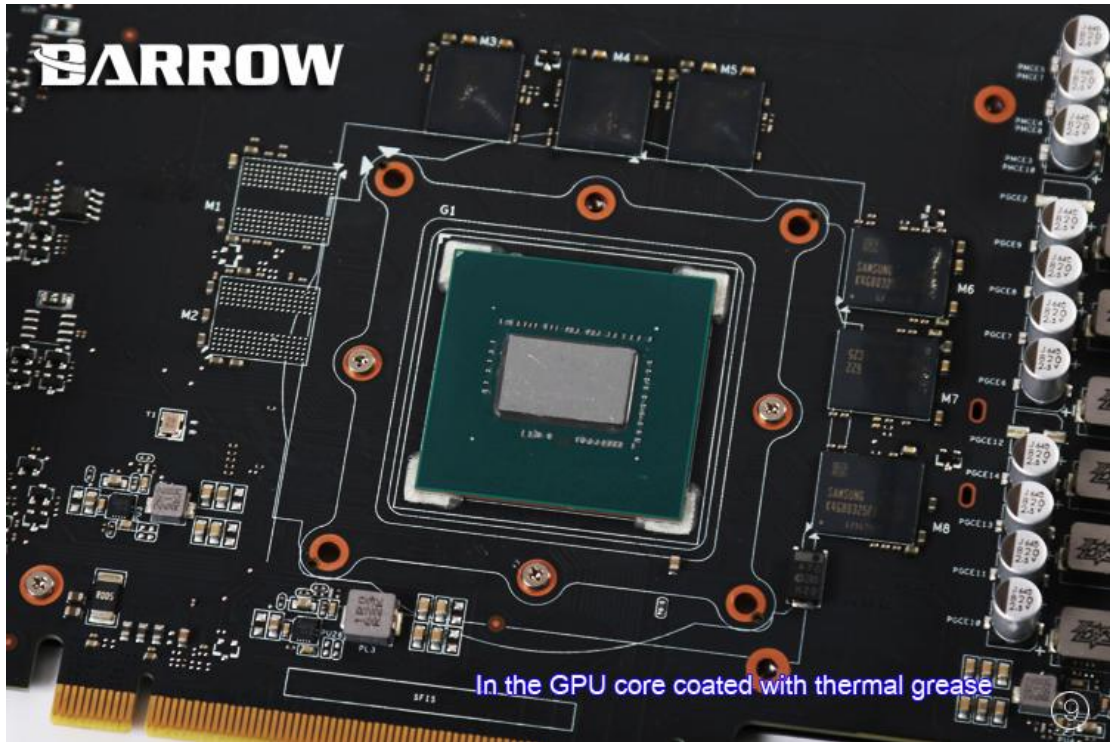


BARROW



Alignment with the original plate back hole distance

BARROW

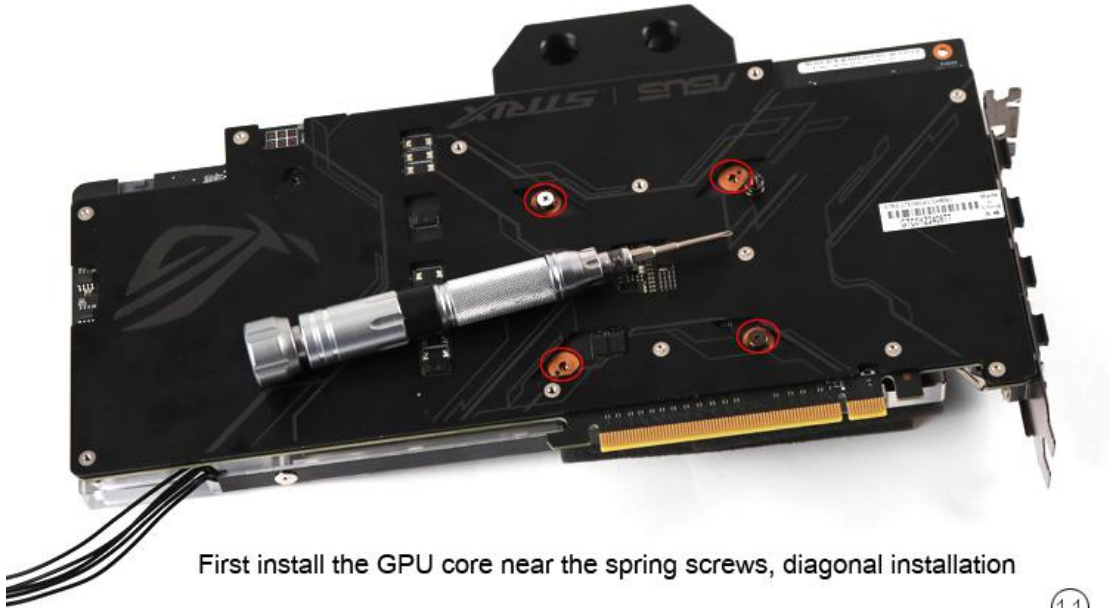

First install the GPU core near the spring screws, diagonal installation

⑪



Second, install the original radiator screws, in order to install on the back

⑫

BARROW



Finally, the spring screw in the installation drawing

13


BARROW



Connect the RGB lamp with an interface to the figure

14

BARROW

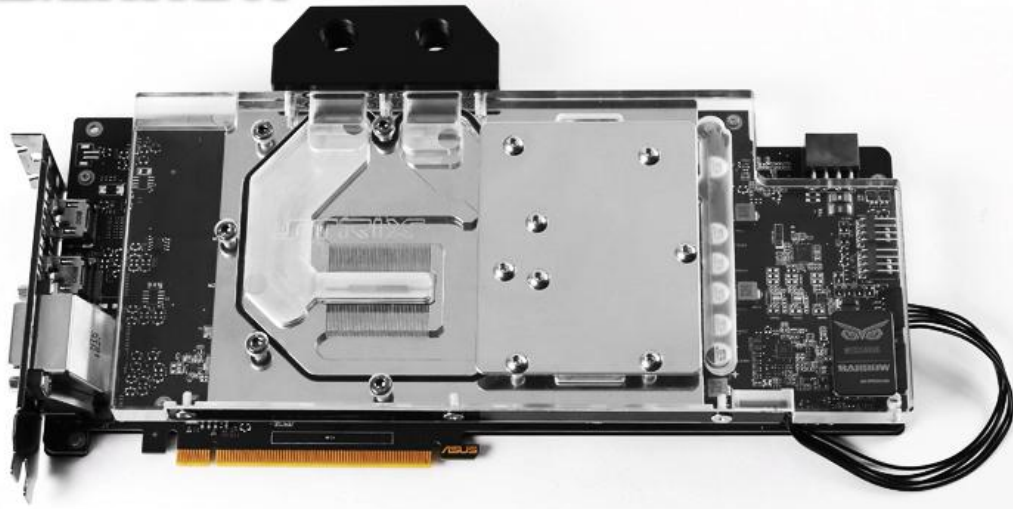

Installation is complete

15